


Anneau double pivot

CE



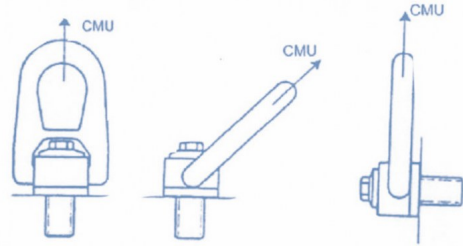

Caractéristiques techniques ? Pivote sur 180° et tourne sur 360° *Double swivel ring* **Sur demande** - Filetage UNC

Note : Pas noté

[Poser une question sur ce produit](#)

Description du produit

∅0 mm	C.M.U kg	Coefficient	L mm	A mm	B mm	Couple serrage N.m	Code produit
M 8	300	5	14	27	40	6	233000008
M 10	600	5	17	27	40	10	233000010
M 12	1000	5	21	27	40	15	233000012
M 14	1300	5	23	38	54	30	233000014
M 16	1600	5	27	38	54	50	233000016
M 18	2300	5	27	38	54	70	233000018
M 20	2500	5	30	38	54	100	233000020
M 22	3000	5	33	55	83	120	233000022
M 24	4000	5	36	55	83	160	233000024
M 27	5000	5	40	55	83	200	233000027
M 30	6300	5	45	55	83	250	233000030
M 33	8000	5	50	73	104	250	233000033
M 36	10000	5	54	73	104	320	233000036
M 39	10000	5	58	73	104	320	233000039
M 42	12500	5	63	73	104	400	233000042
M 45	15000	4	63	73	104	400	233000045
M 48	20000	4	68	91	125	600	233000048
M 52	20000	4	68	91	125	600	233000052
M 56	25000	4	78	91	125	600	233000056
M 64	32100	4	90	91	125	600	233000064
M 72	25000	4	90	91	125	600	233000072
M 80	32100	4	90	91	125	600	233000080
M 90	32100	4	90	91	125	600	233000090
M 100	32100	4	90	91	125	600	233000100

[Téléchargez les informations générales concernant nos articles destinés au levage "CE"](#)

[Téléchargez la notice d'instruction des anneaux de levage articulés](#)